



## DOOR PREPARATION INSTRUCTIONS – NO ALIGNMENT STOPPER™

Please thoroughly read these preparation instructions before proceeding with any doorway work. The preparation process is the same for the B2™ device, as both use the devices as the template for correct positioning.

**Remember, sheltering-in-place should not be a stand-alone defensive strategy. When securing in place, procedure should involve barricading the door and readying a plan of evacuation or counter tactics per your own protocols.**

### **FLOOR ANCHOR HOLE™ – no carpet**

1. Slide Bearacade® under your open door. Close door.
2. Slide Bearacade® until it stops against handle-side doorjamb. Make sure the unit is square to the door. This will be the location of your Bearacade® when deployed.
3. With Bearacade® under door, door closed, Bearacade® touching the doorjamb, and unit square to the door, mark the location of your Floor Anchor Hole™ with an indelible marker or grease pencil through the hole on the Bearacade® unit. (Fig. 1) This is the precise location of your Floor Anchor Hole™.
4. After marking the Floor Anchor Hole™ location, open your door and remove the Bearacade®.
5. Using a standard 3/8" drill bit, pre-drill a hole through existing tile. [Note instructions below for *carpeting*.]
6. After pre-drilling, use 3/8" masonry drill bit and a hammer drill to make the Floor Anchor Hole at least 3½" deep.
7. You are now ready to deploy the Bearacade® in an emergency.



Fig. 1 – Using device to mark Floor Anchor Hole™

### **FLOOR ANCHOR HOLE™ – for rooms with carpet**

1. Slide Bearacade® under your open door. Close door.
2. Slide Bearacade® until it stops against handle-side doorjamb. Make sure the unit is square to the door. This will be the location of your Bearacade® when deployed.
3. With Bearacade® under door, door closed, and Bearacade® touching the doorjamb, mark the location of your Floor Anchor Hole™ with an indelible marker or grease pencil through the hole on the Bearacade® unit as shown onto the carpet. (Fig. 1)
4. Using a 3/8" hole saw on a drill, run the drill IN REVERSE on the marked spot. (Fig. 2) This will cut a simple hole in the carpet down to your flooring. It is important to run the drill IN REVERSE. You can also use a standard carpet punch.
5. With Bearacade® under door, door closed, and Bearacade® touching the doorjamb, mark the location of your Floor Anchor Hole™ with an indelible marker through the Bearacade® as shown onto the flooring below the carpet.
6. After marking the Floor Anchor Hole™ location, open your door and remove the Bearacade®.
7. With 3/8" drill bit, pre-drill hole through existing tile.
8. After pre-drilling, use 3/8" concrete drill bit and a hammer drill to make the Floor Anchor Hole at least 3½" deep.
9. You are now ready to deploy the Bearacade® in a practice drill or an emergency.



Fig. 2 – Hole Saw in Reverse on Carpet



Fig. 3 – Finished Preparation with device deployed

Questions? Email [info@doorbearacade.com](mailto:info@doorbearacade.com) or call toll-free 855-350-2321



## DOOR PREPARATION INSTRUCTIONS – WITH ALIGNMENT STOPPER™

### **FLOOR ANCHOR HOLE™ – no carpet**

1. Mount Alignment Stopper™ 12 inches in from opening side of the door and  $\frac{3}{4}$  inch above bottom of door using black self-tapping screw provided. (Fig. 4)
2. Slide Bearacade® under your open door. Close door.
3. Slide Bearacade® until it stops against Alignment Stopper™ and is square to the door. This will be the location of your Bearacade® when deployed.
4. With Bearacade® under door, door closed, Bearacade® touching the Alignment Stopper™, and unit square to the door, mark the location of your Floor Anchor Hole™ with an indelible marker or grease pencil through the hole on the Bearacade® unit. This will be the precise location of your Floor Anchor Hole™.
5. After marking the Floor Anchor Hole™ location, open your door and remove the Bearacade®.
6. Using standard  $\frac{3}{8}$ " drill bit, pre-drill a hole through existing tile.
7. After pre-drilling, use  $\frac{3}{8}$ " masonry drill bit and hammer drill to make the Floor Anchor Hole™ at least  $3\frac{1}{2}$ " deep. (Fig. 5)
8. You are now ready to deploy the Bearacade® in an emergency.

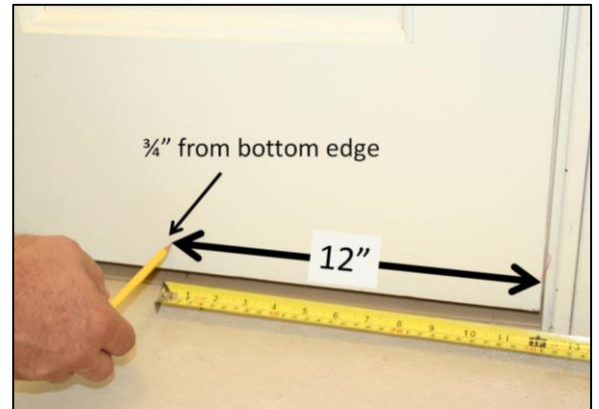


Fig. 4 – Ideal location of Alignment Stopper™

### **FLOOR ANCHOR HOLE™ – for rooms with carpet**

1. Attach Alignment Stopper™ as described above and shown.
2. With Bearacade® under door, door closed, Bearacade® touching the Alignment Stopper™, and unit square to the door, mark the location of your Floor Anchor Hole™ with an indelible marker or grease pencil through the Bearacade® as shown onto the carpet. Using a  $\frac{3}{8}$ " hole saw on a drill, run the drill IN REVERSE on the marked spot. This will cut a simple hole in the carpet down to your flooring. It is important to run the drill IN REVERSE. You can also use a standard carpet punch. (Fig. 2)
3. With Bearacade® under door, door closed, Bearacade® touching the Alignment Stopper™ and square to the door, mark location of your Floor Anchor Hole™ with an indelible marker through the Bearacade® onto the flooring below the carpet. (Fig. 1)
4. After marking the Floor Anchor Hole™ location, open your door and remove the Bearacade®.
5. With a  $\frac{3}{8}$ " drill bit, pre-drill a hole through existing tile.
6. After pre-drilling, use  $\frac{3}{8}$ " concrete drill bit and hammer drill to make the Floor Anchor Hole™ at least  $3\frac{1}{2}$ " deep.
7. You are now ready to deploy the Bearacade® in an emergency.



Fig. 5 – Hammer Drill at least  $3\frac{1}{2}$ " deep



Fig. 6 – Finished Preparation – Alignment Stopper™

**It is important to hang or store the device adjacent to the door and consistently throughout your facility from room to room.**

Questions? Email [info@doorbearacade.com](mailto:info@doorbearacade.com) or call toll-free 855-350-2321